


## Solid State Relay



SDA

DC Control AC

## **MAIN FEATURES**


- DC Voltage Drive AC loading SSR
  - High Stable Reliability
  - Non Switching Sparks
  - Non Noise
  - Non Mechanical Contact
  - Low control Power Consumption
  - High Speed Reaction




## **APPLICATIONS**

- Industrial Control Systems
  - Lighting Systems
  - Vending Machines
  - Production Systems
  - Temperature Control Systems
  - Electronics Home Appliances
  - Medical Equipment
  - Conveying Systems

## **ORDERING INFORMATION**

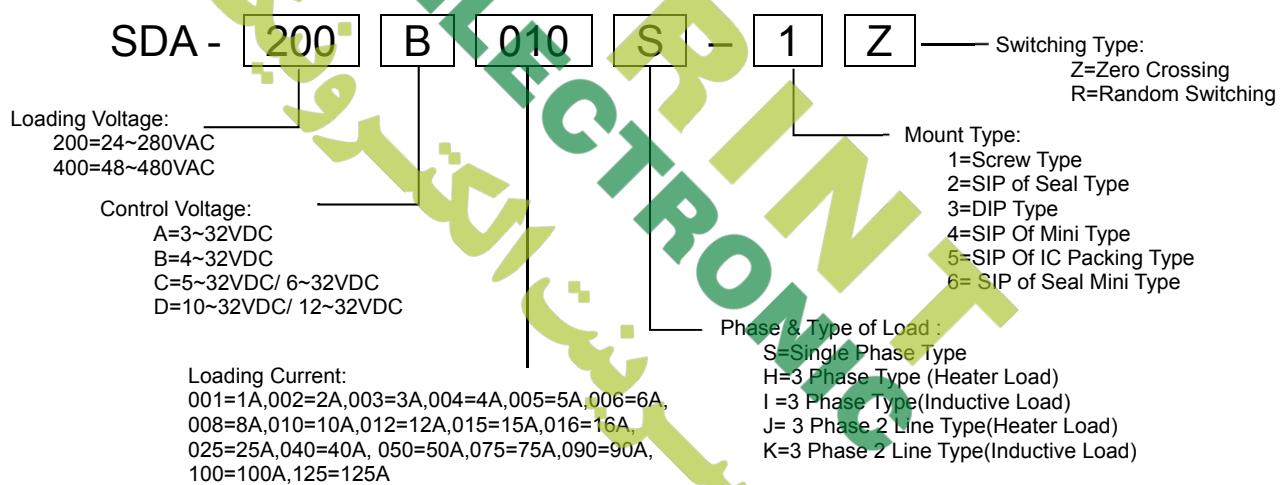

## **OUTLINE DIMENSION**(unit:mm)




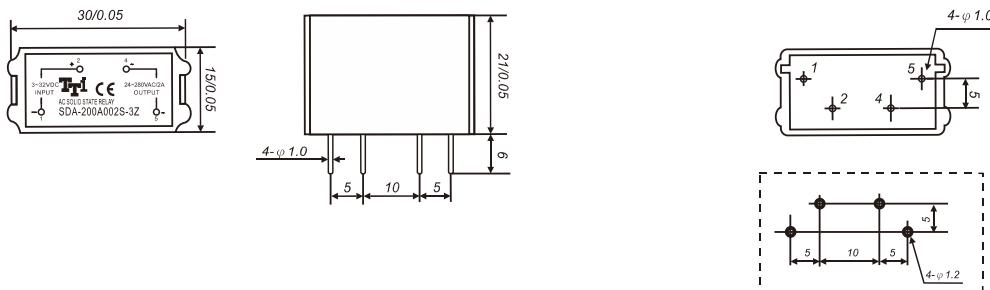


# Solid State Relay


## SPECIFICATIONS

|                       |                               |  |
|-----------------------|-------------------------------|--|
| <b>MODEL NO.</b>      |                               | SDA-200A002S-3R<br>SDA-200A004S-3R<br>SDA-200A002S-3Z<br>SDA-200A004S-3Z |
| <b>MOUNT TYPE</b>     |                               | DIP Type   |
| <b>PHASE</b>          |                               | Single Phase   |
| <b>TYPE OF LOAD</b>   |                               | Z= Heater load<br>R= Inductive load                                      |
| <b>INPUT</b>          | <b>Control Voltage Range</b>  | 3~32VDC  |
|                       | <b>Must Turn Off Voltage</b>  | MAX. 10VDC   |
|                       | <b>Input Impedance</b>        | 1.5 KΩ   |
| <b>OUTPUT</b>         | <b>Max. Load Current</b>      | 2A,4A  |
|                       | <b>Load Voltage Range</b>     | 24~280VAC  |
|                       | <b>Min. Blocking Voltage</b>  | 600VAC peak  |
|                       | <b>Max. Off-State Leakage</b> | Less 3mA   |
|                       | <b>Max.1 cycle Peak Surge</b> | 20A,40A  |
|                       | <b>Max. Off State dv/dt</b>   | 200V/μsec  |
| <b>GENERAL RATING</b> | <b>Isolate Impedance</b>      | 1GΩ  |
|                       | <b>Dielectric Strength</b>    | 2500VAC  |
|                       | <b>Input-Output</b>           | —  |
|                       | <b>Input , Output-Case</b>    | —  |
|                       | <b>Turn On Time</b>           | Less 2 ms  |
|                       | <b>Turn Off Time</b>          | Less 0.5AC Cycle   |
|                       | <b>Frequency Range</b>        | 47~70Hz  |
|                       | <b>Operating Temperature</b>  | -20~+80°C  |
|                       | <b>Switching Type</b>         | Zero Crossing<br>Random Switching  |
| <b>Weight (g)</b>     |                               | 150g   |
| <b>Compliance</b>     |                               | CE , RoHS  |

## CHARACTERISTIC CURVES

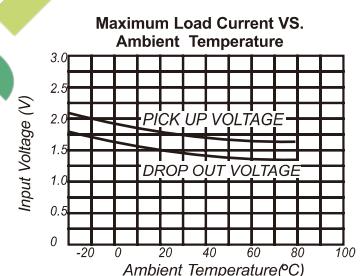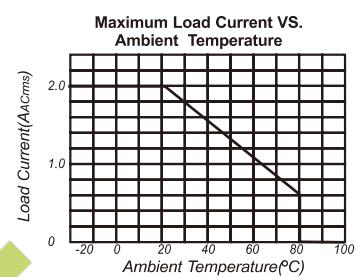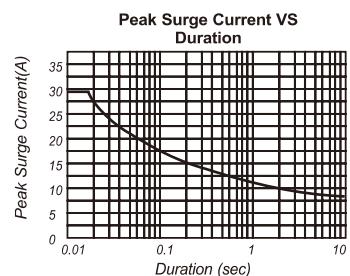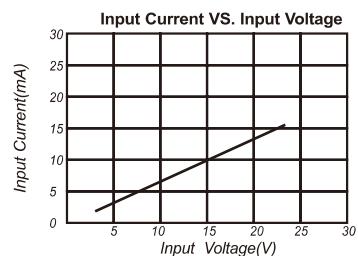

## EQUIVALENT CIRCUIT

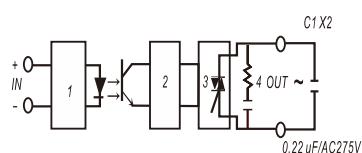

1. Input Circuit
2. Zero-Crossing Circuit
3. Output Circuit
4. Protected Circuit