


# FDD03(U) SERIES

DC - DC CONVERTER  
2 ~ 3W SINGLE & DUAL OUTPUT

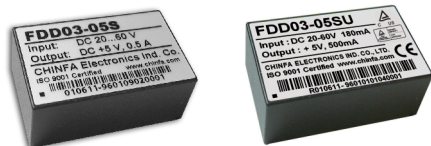

## FDD03 - 05S4 x

BLANK : w/o SAFETY APPROVALS  
U : SAFETY APPROVALS

### FEATURES

- EFFICIENCY UP TO 79%
- 4:1 & 3:1 & 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 3 YEARS WARRANTY



EN 60950-1

### MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)	INPUT CURRENT (max.)	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
-----------	---------------	----------------------	----------------------	----------------	----------------	----------------	-------------	-------------	-----------------------

#### Single Output Models

FDD03 - 05S(U)	20~60 VDC	70 mA	180 mA	2.5 WATTS	+ 5 VDC	500 mA	72%	74%	1000 $\mu$ F
FDD03 - 12S(U)	20~60 VDC	80 mA	200 mA	3 WATTS	+ 12 VDC	250 mA	77%	79%	470 $\mu$ F
FDD03 - 15S(U)	20~60 VDC	80 mA	200 mA	3 WATTS	+ 15 VDC	200 mA	77%	79%	330 $\mu$ F
FDD03 - 05S1(U)	9~18 VDC	265 mA	340 mA	2 WATTS	+ 5 VDC	400 mA	63%	65%	1000 $\mu$ F
FDD03 - 12S1(U)	9~18 VDC	310 mA	380 mA	2.4 WATTS	+ 12 VDC	200 mA	65%	67%	470 $\mu$ F
FDD03 - 15S1(U)	9~18 VDC	285 mA	380 mA	2.4 WATTS	+ 15 VDC	160 mA	65%	67%	330 $\mu$ F
FDD03 - 05S2(U)	18~36 VDC	155 mA	200 mA	2.5 WATTS	+ 5 VDC	500 mA	67%	69%	1000 $\mu$ F
FDD03 - 12S2(U)	18~36 VDC	175 mA	230 mA	3 WATTS	+ 12 VDC	250 mA	70%	72%	470 $\mu$ F
FDD03 - 15S2(U)	18~36 VDC	175 mA	230 mA	3 WATTS	+ 15 VDC	200 mA	70%	72%	330 $\mu$ F
FDD03 - 05S3(U)	36~72 VDC	70 mA	100 mA	2.5 WATTS	+ 5 VDC	500 mA	72%	74%	1000 $\mu$ F
FDD03 - 12S3(U)	36~72 VDC	80 mA	110 mA	3 WATTS	+ 12 VDC	250 mA	77%	79%	470 $\mu$ F
FDD03 - 15S3(U)	36~72 VDC	80 mA	110 mA	3 WATTS	+ 15 VDC	200 mA	77%	79%	330 $\mu$ F
FDD03 - 05S4(U)	9~36 VDC	155 mA	440 mA	2.5 WATTS	+ 5 VDC	500 mA	67%	69%	1000 $\mu$ F
FDD03 - 12S4(U)	9~36 VDC	175 mA	510 mA	3 WATTS	+ 12 VDC	250 mA	70%	72%	470 $\mu$ F
FDD03 - 15S4(U)	9~36 VDC	175 mA	510 mA	3 WATTS	+ 15 VDC	200 mA	70%	72%	330 $\mu$ F
FDD03 - 05S5(U)	18~72 VDC	70 mA	200 mA	2.5 WATTS	+ 5 VDC	500 mA	72%	74%	1000 $\mu$ F
FDD03 - 12S5(U)	18~72 VDC	80 mA	225 mA	3 WATTS	+ 12 VDC	250 mA	77%	79%	470 $\mu$ F
FDD03 - 15S5(U)	18~72 VDC	80 mA	225 mA	3 WATTS	+ 15 VDC	200 mA	77%	79%	330 $\mu$ F

#### Dual Output Models

FDD03 - 05D(U)	20~60 VDC	70 mA	180 mA	2.5 WATTS	$\pm$ 5 VDC	$\pm$ 250 mA	73%	75%	$\pm$ 100 $\mu$ F
FDD03 - 12D(U)	20~60 VDC	80 mA	200 mA	3 WATTS	$\pm$ 12 VDC	$\pm$ 125 mA	75%	77%	$\pm$ 47 $\mu$ F
FDD03 - 15D(U)	20~60 VDC	80 mA	200 mA	3 WATTS	$\pm$ 15 VDC	$\pm$ 100 mA	75%	77%	$\pm$ 22 $\mu$ F
FDD03 - 05D1(U)	9~18 VDC	265 mA	340 mA	2 WATTS	$\pm$ 5 VDC	$\pm$ 200 mA	63%	65%	$\pm$ 100 $\mu$ F
FDD03 - 12D1(U)	9~18 VDC	310 mA	380 mA	2.4 WATTS	$\pm$ 12 VDC	$\pm$ 100 mA	65%	67%	$\pm$ 47 $\mu$ F
FDD03 - 15D1(U)	9~18 VDC	310 mA	380 mA	2.4 WATTS	$\pm$ 15 VDC	$\pm$ 80 mA	65%	67%	$\pm$ 22 $\mu$ F
FDD03 - 05D2(U)	18~36 VDC	155 mA	200 mA	2.5 WATTS	$\pm$ 5 VDC	$\pm$ 250 mA	66%	68%	$\pm$ 100 $\mu$ F
FDD03 - 12D2(U)	18~36 VDC	180 mA	230 mA	3 WATTS	$\pm$ 12 VDC	$\pm$ 125 mA	68%	70%	$\pm$ 47 $\mu$ F

# FDD03(U) SERIES

SINGLE & DUAL OUTPUT

## MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT		OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
		(typ.)	(max.)						
<b>Dual Output Models</b>									
FDD03 - 15D2(U)	18~36 VDC	180 mA	230 mA	3 WATTS	± 15 VDC	± 100 mA	68%	70%	± 22 $\mu$ F
FDD03 - 05D3(U)	36~72 VDC	70 mA	100 mA	2.5 WATTS	± 5 VDC	± 250 mA	73%	75%	± 100 $\mu$ F
FDD03 - 12D3(U)	36~72 VDC	80 mA	110 mA	3 WATTS	± 12 VDC	± 125 mA	75%	77%	± 47 $\mu$ F
FDD03 - 15D3(U)	36~72 VDC	80 mA	110 mA	3 WATTS	± 15 VDC	± 100 mA	75%	77%	± 22 $\mu$ F
FDD03 - 05D4(U)	9~36 VDC	155 mA	440 mA	2.5 WATTS	± 5 VDC	± 250 mA	66%	68%	± 100 $\mu$ F
FDD03 - 12D4(U)	9~36 VDC	180 mA	510 mA	3 WATTS	± 12 VDC	± 125 mA	68%	70%	± 47 $\mu$ F
FDD03 - 15D4(U)	9~36 VDC	180 mA	510 mA	3 WATTS	± 15 VDC	± 100 mA	68%	70%	± 22 $\mu$ F
FDD03 - 05D5(U)	18~72 VDC	70 mA	200 mA	2.5 WATTS	± 5 VDC	± 250 mA	73%	75%	± 100 $\mu$ F
FDD03 - 12D5(U)	18~72 VDC	80 mA	225 mA	3 WATTS	± 12 VDC	± 125 mA	75%	77%	± 47 $\mu$ F
FDD03 - 15D5(U)	18~72 VDC	80 mA	225 mA	3 WATTS	± 15 VDC	± 100 mA	75%	77%	± 22 $\mu$ F

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL							
Characteristics	Conditions	min.	typ.	max.	unit		
Switching frequency	$V_i$ nom, $I_o$ nom	50			KHz		
Isolation voltage	Input - Output	1,500			VDC		
Isolation resistance	Input - Output, @ 500VDC	100			M $\Omega$		
Ambient temperature	Operating at $V_i$ nom, $I_o$ nom	-40		+ 71	°C		
Case temperature	Operating at $V_i$ nom, $I_o$ nom			+ 90	°C		
Derating	$V_i$ nom	See derating curve					
Storage temperature	Non operational	-40		+ 100	°C		
Relative humidity	$V_i$ nom, $I_o$ nom	20		95	% RH		
Temperature coefficient	$V_i$ nom, $I_o$ min			± 0.02	% / °C		
Dimension		L31.8 x W20.3 x H12.7				mm	
MTBF	Bellcore issue 6 @ 40°C, GB		1,640,000		Hours		
Cooling	Free air convection						
INPUT SPECIFICATIONS							
Characteristics	Conditions	min.	typ.	max.	unit		
Input voltage range	$T_a$ min ... $T_a$ max, $I_o$ nom	2 : 1	9	12	18	VDC	
			18	24	36	VDC	
			36	48	72	VDC	
		3 : 1	20	48	60	VDC	
			4 : 1	9	24	36	VDC
				18	48	72	VDC
No load input current	$V_i$ nom, $I_o = 0$	12V		18	mA		
		24V		15	mA		
		48V		8	mA		
		Input voltage w/o damage	$I_o$ nom	12V		20	VDC
Startup voltage	$I_o$ nom	24V		40	VDC		
		48V		75	VDC		
		12V	7.2		VDC		
		24V	7.2		VDC		
		48V	16.1		VDC		
OUTPUT SPECIFICATIONS							
Characteristics	Conditions	min.	typ.	max.	unit		
Output voltage accuracy	$V_i$ nom, $I_o$ nom			± 2	%		
Minimum load	$V_i$ nom	single output models	0		%		
		dual output models (each output)	20		%		

# FDD03(U) SERIES

SINGLE & DUAL OUTPUT

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Line regulation	$I_o$ nom, $V_i$ min ... $V_i$ max			± 1	%
Load regulation	$V_i$ nom, $I_o$ 0 ... $I_o$ nom, single output models			± 2	%
	$V_i$ nom, $I_o$ min ... $I_o$ nom, dual output models			± 5	%
Cross regulation (Dual model)	Aymmetrical load 20% - 100% FL			± 10	%
Startup time	$V_i$ nom, $I_o$ nom			30	ms
Transient recovery time	$V_i$ nom, $I \sim 0.5 I_o$ nom			3	ms
Ripple & noise	$V_i$ nom, $I_o$ nom, BW = 20MHz			300	mV
Efficiency	$V_i$ nom, $I_o$ nom, $P_o / P_i$	Up to 79%. See model list and efficiency curve			

### CONTROL AND PROTECTION

Input reversed	External shunt diode, external fuse recommended ( 12Vin : 0.75A, 24Vin : 0.75A, 48Vin : 0.5A )
Output short circuit	Current limited (Auto-recovery)

### APPROVALS AND STANDARD

cTUVus	UL 60950-1 Recognized
TUV	EN 60950-1
CE ( I )	EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8
Vibration	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)


NOTE 1 : Pls refer to recommended circuit .

### PHYSICAL CHARACTERISTICS

Case size	31.8 x 20.3 x 12.7 mm (1.25 x 0.8 x 0.5 inches)
Case material	Plastic
Weight	15 g
Potting material	Epoxy

### MECHANISM & PIN CONFIGURATION

mm [inch]

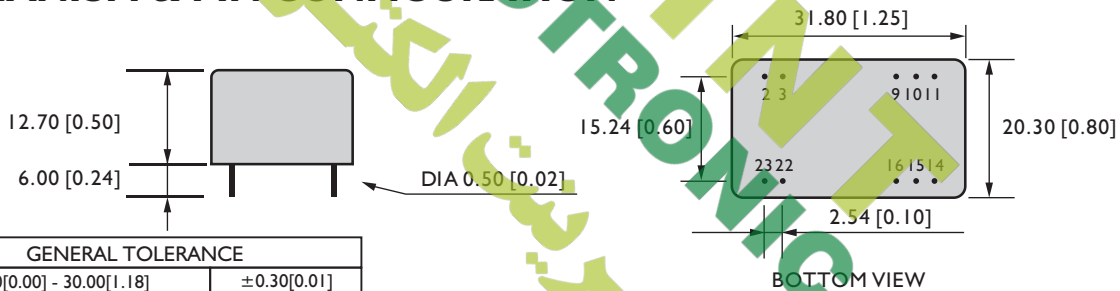


### PIN ASSIGNMENT

#### GENERAL


PIN NO.	2&3	9	10&15	11	14	16	22&23
SINGLE	$V_i$ -	N. C.	N. C.	N. C.	$V_o$ +	$V_o$ -	$V_i$ +
DUAL	$V_i$ -	com	N. C.	$V_o$ -	$V_o$ +	com	$V_i$ +

### APPLICATION CIRCUIT

a. SINGLE OUTPUT MODELS :

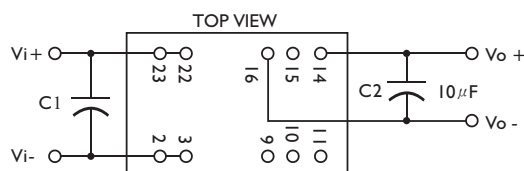

b. DUAL OUTPUT MODELS :

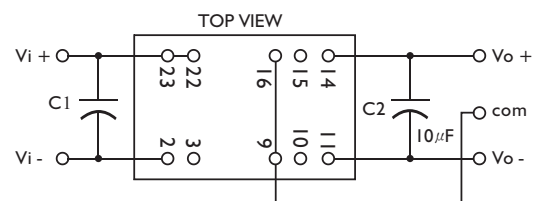

#### NOTE:

a.  $C_1 = 4.7\mu F / 100V$ ,  $C_2 = 10\mu F$

b.  $C_1$  MUST BE ADDED WHEN APPLICATION .

c.  $C_2$  OPTIONAL TO MINIMIZE THE R & N < 100mV .


d. MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS .

# FDD03(U) SERIES


SINGLE & DUAL OUTPUT

## CIRCUIT SCHEMATIC

• Block diagram for FDD03(U) series with single output

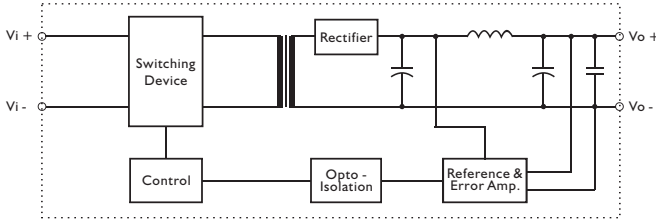


• Block diagram for FDD03(U) series with dual output

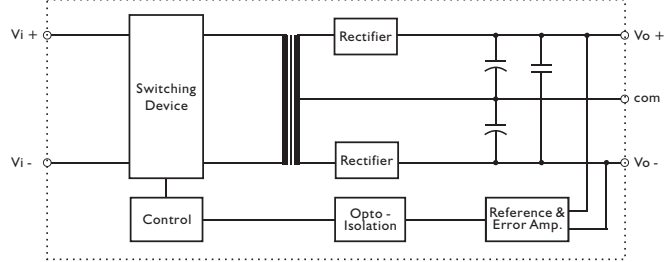

## RECOMMENDED CIRCUIT

• Recommended filter for EN55022 Class B compliance

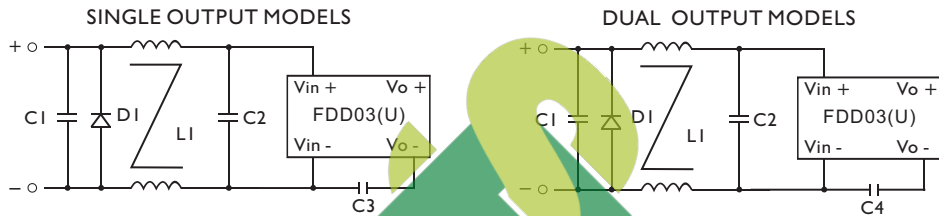


Note: DI - Reverse Diode (1A/100V)




• The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

	C1	C2	C3	C4	L1
FDD03-XXSX(U)	6.8 $\mu$ F / 100V MLCC	4.7 $\mu$ F / 100V MLCC	InF/2KV MLCC		3mH Common Choke
FDD03-XXDX(U)	6.8 $\mu$ F / 100V MLCC	4.7 $\mu$ F / 100V MLCC		InF/2KV MLCC	3mH Common Choke

• Recommended EN 55022 Class B filter circuit layout.

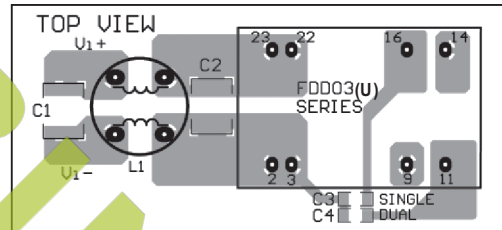

## DERATING AND EFFICIENCY CURVE

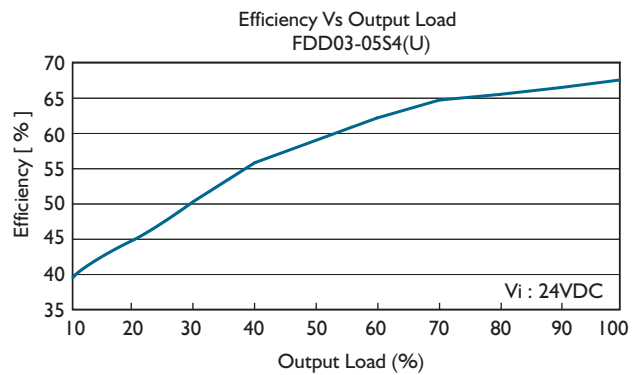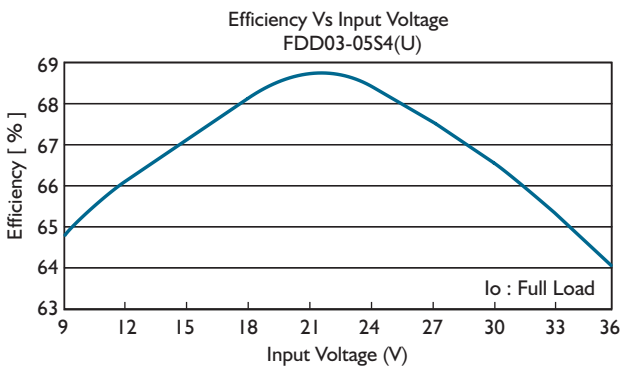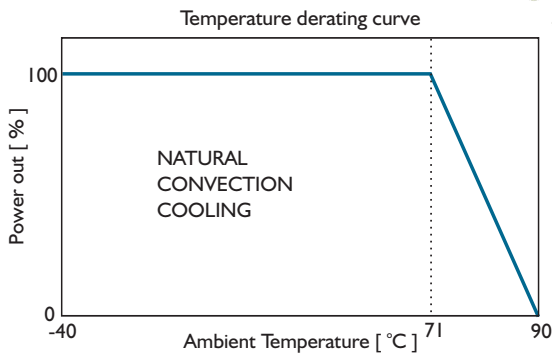

# FDD03A(U) SERIES

DC - DC CONVERTER

2.5 ~ 3W SINGLE & DUAL OUTPUT



## FDD03 - 05S4A x

BLANK : w/o SAFETY APPROVALS  
U : SAFETY APPROVALS

### FEATURES

- 4:1 WIDE INPUT RANGE
- DIP24 PACKAGE
- I/O, O/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- UL/cUL/TUV/CE
- 3 YEARS WARRANTY



EN 60950-1

### MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)	INPUT CURRENT (max.)	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
<b>Single Output Models</b>									
FDD03 - 05S4A(U)	9~36 VDC	160 mA	440 mA	2.5 WATTS	+ 5 VDC	500 mA	65%	67%	1000 $\mu$ F
FDD03 - 12S4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	+ 12 VDC	250 mA	68%	70%	470 $\mu$ F
FDD03 - 15S4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	+ 15 VDC	200 mA	68%	70%	330 $\mu$ F
FDD03 - 05S5A(U)	18~72 VDC	75 mA	205 mA	2.5 WATTS	+ 5 VDC	500 mA	70%	72%	1000 $\mu$ F
FDD03 - 12S5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	+ 12 VDC	250 mA	75%	77%	470 $\mu$ F
FDD03 - 15S5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	+ 15 VDC	200 mA	75%	77%	330 $\mu$ F
<b>Dual Output Models</b>									
FDD03 - 05D4A(U)	9~36 VDC	155 mA	440 mA	2.5 WATTS	$\pm$ 5 VDC	$\pm$ 250 mA	66%	68%	$\pm$ 100 $\mu$ F
FDD03 - 12D4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	$\pm$ 12 VDC	$\pm$ 125 mA	68%	70%	$\pm$ 47 $\mu$ F
FDD03 - 15D4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	$\pm$ 15 VDC	$\pm$ 100 mA	68%	70%	$\pm$ 22 $\mu$ F
FDD03 - 05D5A(U)	18~72 VDC	70 mA	205 mA	2.5 WATTS	$\pm$ 5 VDC	$\pm$ 250 mA	72%	74%	$\pm$ 100 $\mu$ F
FDD03 - 12D5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	$\pm$ 12 VDC	$\pm$ 125 mA	75%	77%	$\pm$ 47 $\mu$ F
FDD03 - 15D5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	$\pm$ 15 VDC	$\pm$ 100 mA	75%	77%	$\pm$ 22 $\mu$ F
<b>Double Output Models</b>									
FDD03 - 0505D4A(U)	9~36 VDC	160 mA	440 mA	2.5 WATTS	5 / 5 VDC	250 / 250 mA	66%	68%	100 $\mu$ F
FDD03 - 1212D4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	12 / 12 VDC	125 / 125 mA	68%	70%	47 $\mu$ F
FDD03 - 1515D4A(U)	9~36 VDC	180 mA	530 mA	3 WATTS	15 / 15 VDC	100 / 100 mA	68%	70%	22 $\mu$ F
FDD03 - 0505D5A(U)	18~72 VDC	70 mA	205 mA	2.5 WATTS	5 / 5 VDC	250 / 250 mA	72%	74%	100 $\mu$ F
FDD03 - 1212D5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	12 / 12 VDC	125 / 125 mA	75%	77%	47 $\mu$ F
FDD03 - 1515D5A(U)	18~72 VDC	80 mA	235 mA	3 WATTS	15 / 15 VDC	100 / 100 mA	75%	77%	22 $\mu$ F

#### NOTE :

MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS.

# FDD03A(U) SERIES

WITH REMOTE FUNCTION

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL					
Characteristics	Conditions	min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom	50			KHz
Isolation voltage	Input - Output	1,500			VDC
Isolation resistance	Input - Output, @ 500VDC	100			MΩ
Ambient temperature	Operating at Vi nom, Io nom	-40		+ 71	°C
Case temperature	Operating at Vi nom, Io nom			+90	°C
Derating	Vi nom	See derating curve			
Storage temperature	Non operational	-40		+ 100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			± 0.02	% / °C
Dimension		L31.8 x W20.3 x H12.7			mm
MTBF	Bellcore issue 6@40°C, GB		1,640,000		Hours
Cooling	Free air convection				

INPUT SPECIFICATIONS					
Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9	24	36	VDC
		18	48	72	VDC
No load input current	Vi nom, Io = 0	24V		15	mA
		48V		8	mA
Input voltage w/o damage	Io nom	24V		40	VDC
		48V		75	VDC
Startup voltage	Io nom	24V	7.2		VDC
		48V	16.1		VDC

OUTPUT SPECIFICATIONS					
Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			± 2	%
Minimum load	Vi nom, single output models	0			%
	Vi nom, dual output models (each output)	20			%
Line regulation	Io nom, Vi min ... Vi max			± 1	%
Load regulation	Vi nom, Io 0 ... Io nom, single output models			± 2	%
	Vi nom, Io min ... Io nom, dual output models			± 5	%
Cross regulation (Dual model)	Aymmetrical load 20% - 100% FL			± 10	%
Startup time	Vi nom, Io nom			30	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			3	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz			150	mV
Efficiency	Vi nom, Io nom, Po / Pi	Up to 77%, See model list and efficiency curve			

CONTROL AND PROTECTION	
Remote ON / OFF	ON: opened or 5~10 VDC applied, reference to input GND OFF: -0.3~2 VDC applied, reference to input GND
Input reversed	External shunt diode, external fuse recommended ( 24Vin : 0.75A, 48Vin : 0.5A )
Output short circuit	Current limited (Auto-recovery)

APPROVALS AND STANDARD	
cTUVus	UL 60950-1 Recognized
TUV	EN 60950-1
CE I)	EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8
Vibration	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)

NOTE 1 : Pls refer to recommended circuit .

# FDD03A(U) SERIES


WITH REMOTE FUNCTION

## PHYSICAL CHARACTERISTICS

Case size	31.8 x 20.3 x 12.7 mm (1.25 x 0.8 x 0.5 inches)
Case material	Plastic
Weight	15 g
Potting material	Epoxy

## MECHANISM & PIN CONFIGURATION

mm [inch]

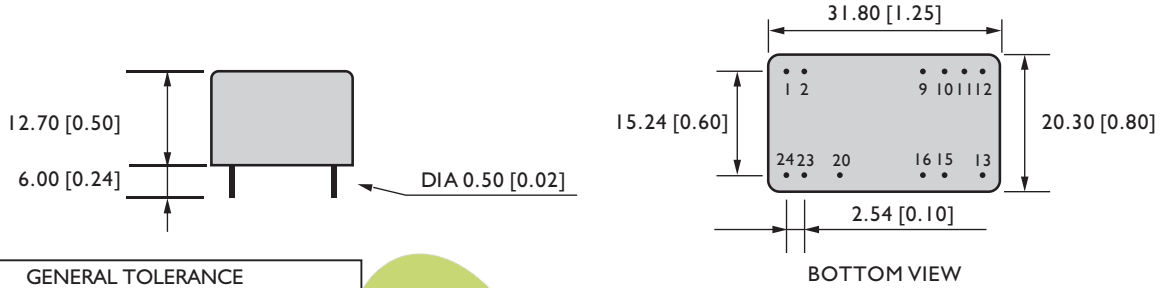

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


## PIN ASSIGNMENT

### GENERAL


PIN NO.	1&2	9	10&11	12	13	15	16	20	23&24
SINGLE	Vi+	NO PIN	NO PIN	Vo-	Vo+	NO PIN	NO PIN	Remote ON/OFF	Vi-
DUAL	Vi+	NO PIN	com	NO PIN	Vo-	Vo+	NO PIN	Remote ON/OFF	Vi-
DOUBLE	Vi+	Vo1-	NO PIN	Vo1+	Vo2+	NO PIN	Vo2-	Remote ON/OFF	Vi-

## CIRCUIT SCHEMATIC


• Block diagram for FDD03A(U) series with single output

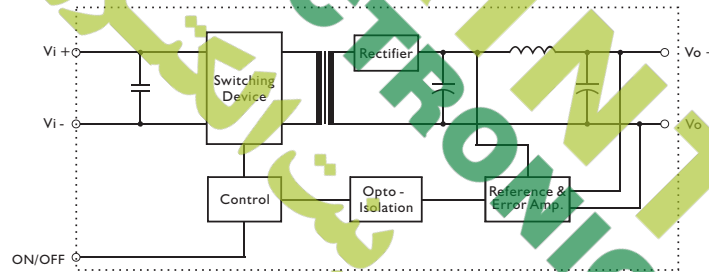

• Block diagram for FDD03A(U) series with dual output

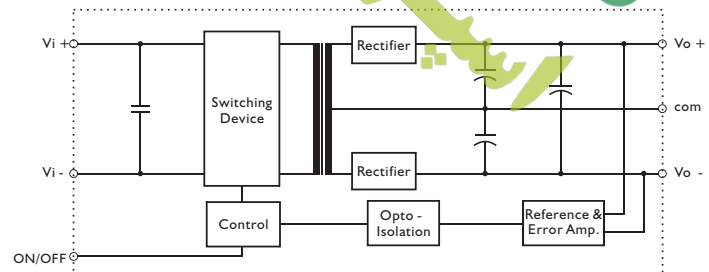

• Block diagram for FDD03A(U) series with double output

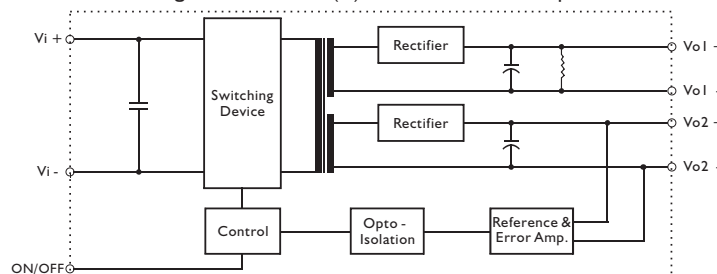


# FDD03A(U) SERIES

WITH REMOTE FUNCTION


## RECOMMENDED CIRCUIT

- Recommended filter for EN55022 Class B compliance


SINGLE OUTPUT MODELS

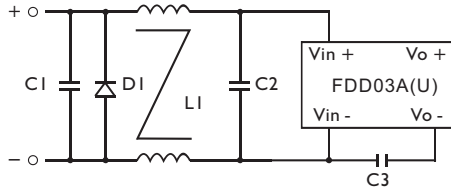

DUAL OUTPUT MODELS

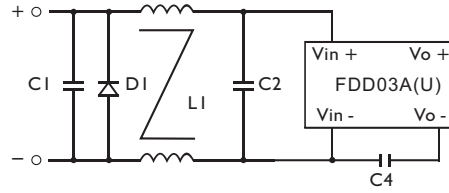

DOUBLE OUTPUT MODELS

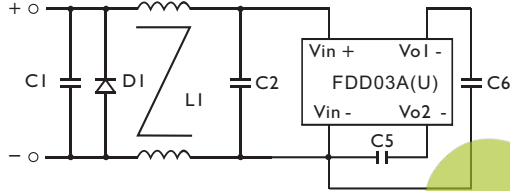


Note: D1 - Reverse Diode (1A / 100V)

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.


	C1	C2	C3	C4	C5	C6	L1
FDD03-XXSXA(U)	6.8µF / 100V MLCC	4.7µF / 100V MLCC	InF/2KV MLCC				3mH Common Choke
FDD03-XXDXA(U)	6.8µF / 100V MLCC	4.7µF / 100V MLCC	InF/2KV MLCC				3mH Common Choke
FDD03-XXXXXA(U)	6.8µF / 100V MLCC	4.7µF / 100V MLCC			InF/2KV MLCC	InF/2KV MLCC	3mH Common Choke

- Recommended EN 55022 Class B filter circuit layout.

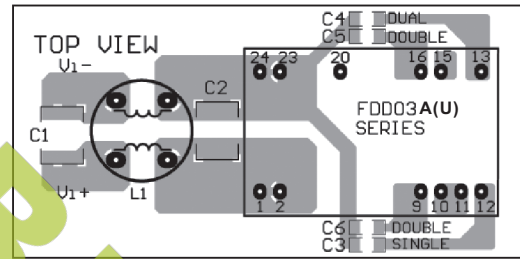


## DERATING AND EFFICIENCY CURVE

Temperature derating curve

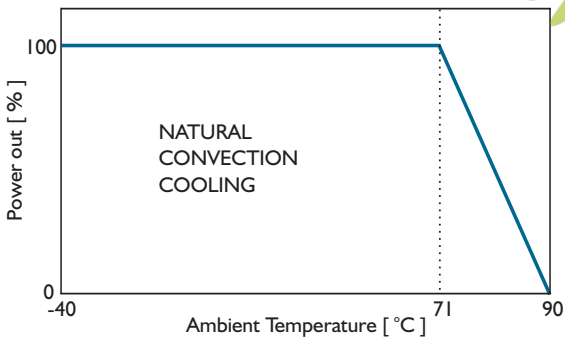

Efficiency Vs Input Voltage  
FDD03-05S4A(U)

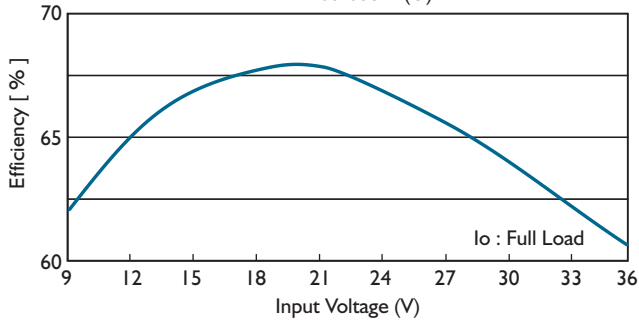

Efficiency Vs Output Load  
FDD03-05S4A(U)

