

RDD08U SERIES

DC - DC CONVERTER
6.6 ~ 8.1W SINGLE & DUAL OUTPUT



FEATURES

- EFFICIENCY UP TO 85%
- 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- INPUT π FILTER
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- UL/cUL/TUV/CE
- 3 YEARS WARRANTY



EN 60950-1

MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT		OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
		(typ.)	(max.)						
Single Output Models									
RDD08 - 03S1U	9~18 VDC	0.69A	0.97A	6.6 WATTS	+3.3 VDC	2000 mA	78%	80%	3300 μ F
RDD08 - 05S1U	9~18 VDC	0.77A	1.07A	7.5 WATTS	+ 5 VDC	1500 mA	80%	82%	2200 μ F
RDD08 - 12S1U	9~18 VDC	0.79A	1.11A	8 WATTS	+ 12 VDC	670 mA	83%	85%	470 μ F
RDD08 - 15S1U	9~18 VDC	0.80A	1.11A	8.1 WATTS	+ 15 VDC	540 mA	83%	85%	330 μ F
RDD08 - 03S2U	18~36 VDC	0.35A	0.48A	6.6 WATTS	+3.3 VDC	2000 mA	78%	80%	3300 μ F
RDD08 - 05S2U	18~36 VDC	0.38A	0.53A	7.5 WATTS	+ 5 VDC	1500 mA	81%	83%	2200 μ F
RDD08 - 12S2U	18~36 VDC	0.40A	0.55A	8 WATTS	+ 12 VDC	670 mA	83%	85%	470 μ F
RDD08 - 15S2U	18~36 VDC	0.40A	0.55A	8.1 WATTS	+ 15 VDC	540 mA	83%	85%	330 μ F
RDD08 - 03S3U	35~75 VDC	0.17A	0.25A	6.6 WATTS	+3.3 VDC	2000 mA	78%	80%	3300 μ F
RDD08 - 05S3U	35~75 VDC	0.19A	0.27A	7.5 WATTS	+ 5 VDC	1500 mA	81%	83%	2200 μ F
RDD08 - 12S3U	35~75 VDC	0.20A	0.28A	8 WATTS	+ 12 VDC	670 mA	83%	85%	470 μ F
RDD08 - 15S3U	35~75 VDC	0.20A	0.28A	8.1 WATTS	+ 15 VDC	540 mA	83%	85%	330 μ F

Dual Output Models

RDD08 - 05D1U	9~18 VDC	0.82A	1.14A	8 WATTS	\pm 5 VDC	\pm 800 mA	80%	82%	\pm 1000 μ F
RDD08 - 12D1U	9~18 VDC	0.81A	1.12A	8.1 WATTS	\pm 12 VDC	\pm 340 mA	83%	85%	\pm 180 μ F
RDD08 - 15D1U	9~18 VDC	0.81A	1.12A	8.1 WATTS	\pm 15 VDC	\pm 270 mA	83%	85%	\pm 100 μ F
RDD08 - 05D2U	18~36 VDC	0.41A	0.56A	8 WATTS	\pm 5 VDC	\pm 800 mA	81%	83%	\pm 1000 μ F
RDD08 - 12D2U	18~36 VDC	0.40A	0.56A	8.1 WATTS	\pm 12 VDC	\pm 340 mA	83%	85%	\pm 180 μ F
RDD08 - 15D2U	18~36 VDC	0.40A	0.56A	8.1 WATTS	\pm 15 VDC	\pm 270 mA	83%	85%	\pm 100 μ F
RDD08 - 05D3U	35~75 VDC	0.20A	0.29A	8 WATTS	\pm 5 VDC	\pm 800 mA	81%	83%	\pm 1000 μ F
RDD08 - 12D3U	35~75 VDC	0.20A	0.29A	8.1 WATTS	\pm 12 VDC	\pm 340 mA	83%	85%	\pm 180 μ F
RDD08 - 15D3U	35~75 VDC	0.20A	0.29A	8.1 WATTS	\pm 15 VDC	\pm 270 mA	83%	85%	\pm 100 μ F

RDD08U SERIES

SINGLE & DUAL OUTPUT

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		280		KHz
Isolation voltage	Input / Output	1,500			VDC
Isolation resistance	Input / Output, @ 500VDC	100			MΩ
Isolation capacitance	100KHz / 1V		1,000		PF
Ambient temperature	Operating at Vi nom, Io nom	-40		+ 71	°C
Case temperature	Operating at Vi nom, Io nom			+ 100	°C
Derating	Vi nom	See derating curve			
Storage temperature	Non operational	-40		+ 100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			± 0.02	% / °C
Dimension		L31.8 x W20.3 x H10.2			mm
MTBF	Bellcore issue 6 @ 40°C, GB		1,309,000		Hours
Cooling	Free air convection				

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9	12	18	VDC
		18	24	36	VDC
		36	48	75	VDC
No load input current	Vi nom, Io = 0	12V		30	mA
		24V		25	mA
		48V		20	mA
Input voltage w/o damage	Io nom	12V		20	VDC
		24V		40	VDC
		48V		80	VDC
Startup voltage	Io nom	12V	8.7		VDC
		24V	17.4		VDC
		48V	31.5		VDC
Input filter	Pi type				

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			± 2	%
Minimum load	Vi nom single output models	0			%
	Vi nom dual output models (each output)	10			%
Line regulation	Io nom, Vi min ... Vi max			± 0.5	%
Load regulation	Vi nom, Io 0 ... Io nom, single output models			± 0.5	%
	Vi nom, Io min ... Io nom, dual output models			± 1	%
Cross regulation (Dual modle)	Aymmetrical load 10% - 100% FL			± 5	%
Startup time	Vi nom, Io nom			700	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			1	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz			50	mV
Efficiency	Vi nom, Io nom, Po / Pi	Up to 85%, See model list and efficiency curve			

RDD08U SERIES

SINGLE & DUAL OUTPUT

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

CONTROL AND PROTECTION

Input reversed	Shunt diode built in, external fuse recommended 1A
Output short circuit	Current limited (Auto-recovery)
Rated over load protection	110%min....140%max
Remote on/off control	ON : 3....10Vdc or open circuit OFF: 0....1.5Vdc or short circuit pin 1 and pin2,3

APPROVALS AND STANDARD


UL/cUL	UL 60950-1 Recognized
TUV	EN 60950-1
CE	EN 61204-3, EN 55022 Class A, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6
Vibration	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)

PHYSICAL CHARACTERISTICS

Case size	31.8 x 20.3 x 10.2 mm (1.25 x 0.8 x 0.4 inches)
Case material	Plastic base / Metal case
Weight	18 g
Potting material	Silicone

MECHANISM & PIN CONFIGURATION

mm [inch]

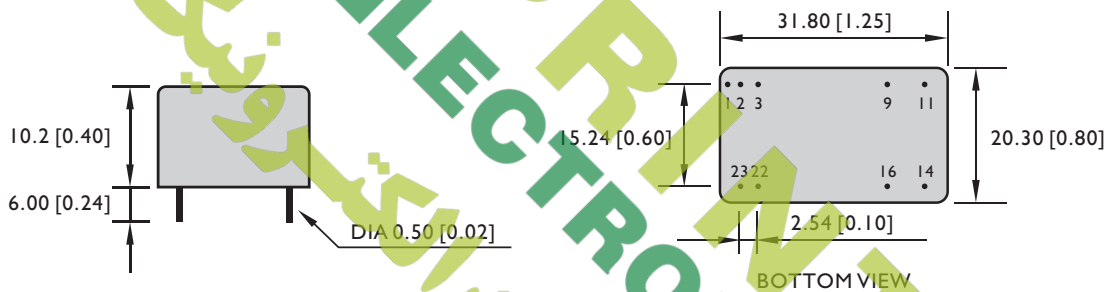

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


PIN ASSIGNMENT

GENERAL


PIN NO.	1	2 & 3	9	11	14	16	22 & 23
SINGLE	Remote On/Off	Vi -	N. C.	N. C.	Vo+	Vo -	Vi+
DUAL	Remote On/Off	Vi -	com	Vo -	Vo+	com	Vi+

CIRCUIT SCHEMATIC

• Block diagram for RDD08U series with single output

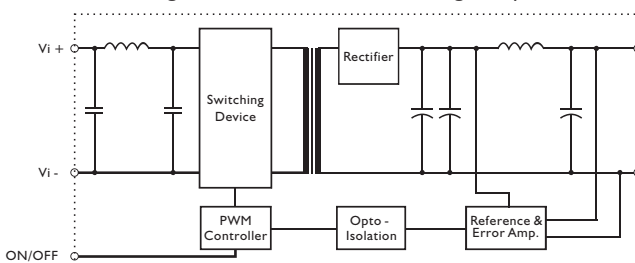

• Block diagram for RDD08U series with dual output

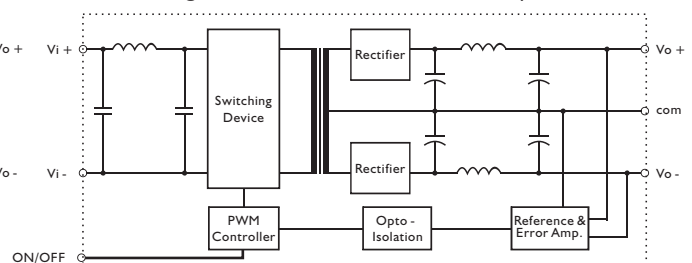


RDD08U SERIES

SINGLE & DUAL OUTPUT

RECOMMENDED CIRCUIT


- Recommended filter for EN55022 Class B compliance.

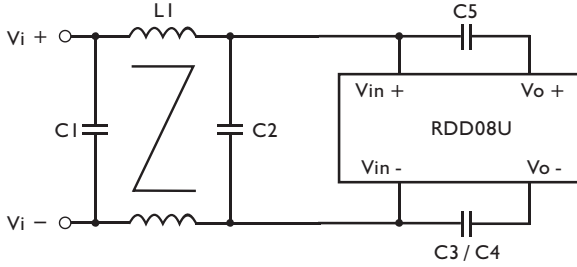

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

	C1	C2	C3 / C4	C5	L1
RDD08-XXX1U	2.2 μ F / 50V MLCC	4.7 μ F / 50V MLCC	1nF/2KV MLCC	1nF/2KV MLCC	1.5mH Common Choke
RDD08-XXX2U	2.2 μ F / 50V MLCC	4.7 μ F / 50V MLCC	1nF/2KV MLCC	1nF/2KV MLCC	1.5mH Common Choke
RDD08-XXX3U	2.2 μ F / 100V MLCC	2.2 μ F / 100V MLCC	1nF/2KV MLCC	1nF/2KV MLCC	1.5mH Common Choke

- Recommended EN 55022 Class B filter circuit layout.

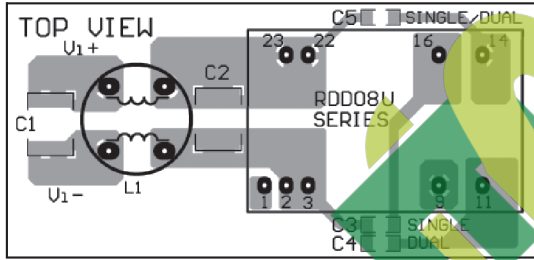

DERATING AND EFFICIENCY CURVE

