


SNAP ACTION SWITCH

Features

- Reliability is excellent.
- It's has long life and more operating force can be applied such as lightly force.
- Good feeling and more levers are applied.

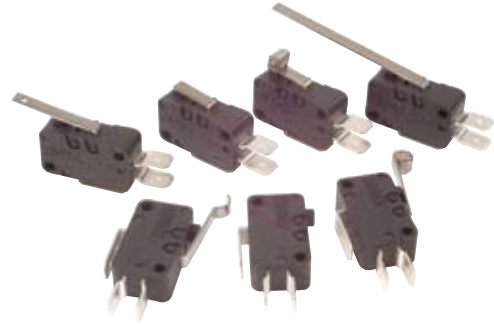

Applications

- Joystick , TV game , Time recorder , Air conditioner , Food processor , Juice maker , Alarm , Mixer , Shredder machine , etc.

Specifications

Item	Standard	
Rating	14(4)A 250V AC	15A 250V AC
Conforming to standards	UL 61058-1	UL 1054
Contact Resistance	15 mΩ max. (initial)	
Insulation Resistance	100MΩ min. (at 500V DC)	
Dielectric Strength	Between terminals of same polarity AC 1000V (50/60Hz for 1minute)	
	Between each terminal and non-current-carrying rind parts AC 2000V (50/60Hz for 1 minute)	
Electrically Life	100,000 cycles	
Mechanically Life	1,000,000 cycles	

Product Selection

VT16 ☐ ☐ ☐
1 2 3


1. ACTUATOR TYPES

00: Pin plunger	04: Simulated roller lever
01: Short hinge lever	05: Short hinge roller lever
02: Hinge lever	06: Hinge roller lever
03: Long hinge lever	

2.CONTACT FORM & COMMON TERMINAL POSITION

Contact form	1: SPDT	2: SPST-NC	3: SPST-NO
Common terminal position	button 	button 	button

Mounting Holes



3.Terminal Type

Solder terminal (-A)		Quick-connect terminal 6.4x0.8 (-C)		Quick-connect terminal 4.8x0.8 (-C2)	

HIGHLY

B10

Design, specifications are subject to change without notice.

SNAP ACTION SWITCH


Operating Characteristics

Unit: mm

Item	Operating Characteristics	Dimensions
VT1600		




OF	max	250g.
RF	min	30g
PT	max..	1.4 mm
OT	min.	0.8 mm
MD	max.	0.4 mm
OP		14.7±0.4 mm

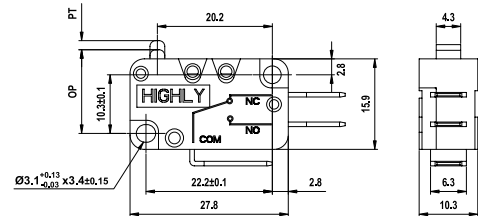

VT1601




OF	max.	250g
RF	min.	20g
PT	max.	1.6 mm
OT	min.	0.8 mm
MD	max.	0.4 mm
OP		15.2±0.6 mm

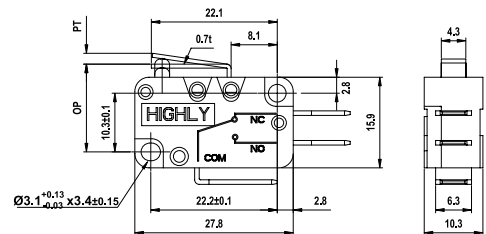

VT1602




OF	max.	120g
RF	min.	10g
PT	max.	3.2 mm
OT	min.	1.8 mm
MD	max.	1.0 mm
OP		15.2±1.5 mm

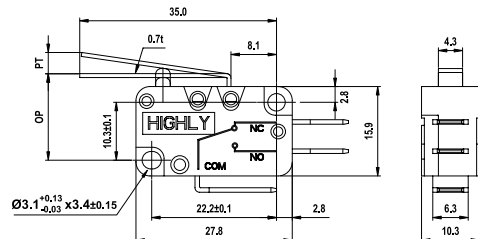

VT1603



OF	max.	60g
RF	min.	5g
PT	max.	8.0 mm
OT	min.	3.0 mm
MD	max.	2.2 mm
OP		15.2±2.6 mm

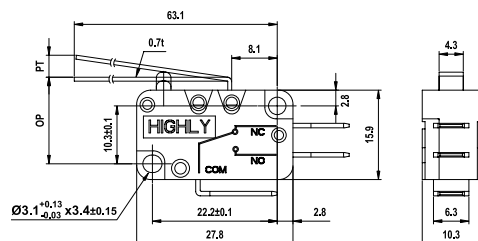

HIGHLY

B11

Design, specifications are subject to change without notice.

SNAP ACTION SWITCH


Operating Characteristics

Unit: mm

Item	Operating Characteristics	Dimensions
VT1604		




OF	max.	120g
RF	min.	10g
PT	max.	3.2 mm
OT	min.	1.8 mm
MD	max.	1.0 mm
OP		18.7 ± 1.2 mm

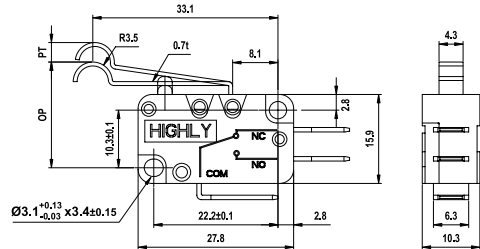


VT1605



OF	max.	250g
RF	min.	30g
PT	max.	14 mm
OT	min.	0.8 mm
MD	max.	0.4 mm
OP		20.7 ± 0.6 mm

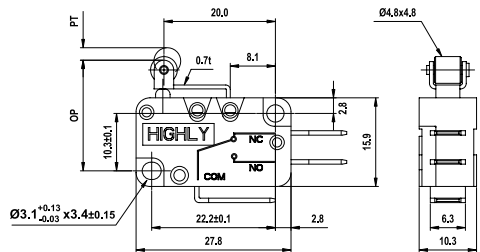

VT1606



OF	max.	120g
RF	min.	10g
PT	max.	3.2 mm
OT	min.	1.8 mm
MD	max.	1.0 mm
OP		20.7 ± 1.5 mm

