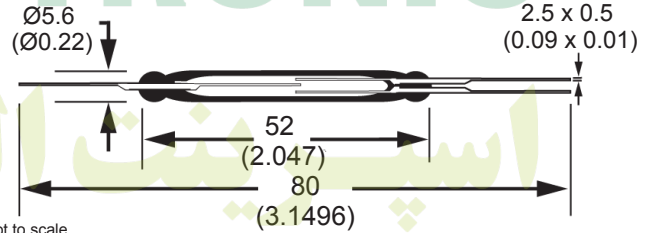


**PICTURE**
**DIMENSIONS**


cULus File # E103299

**RoHS Compliant**

 Drawings not to scale.  
 All dimensions in mm (inches).

**SPECIFICATION**

Contact Form		Change-Over
Contact Material		Rhodium
Switching Capacity	Max.	60 W/VA
Switching Voltage	Max.	230 VAC / DC
Switching Current	Max.	1.0 A
Carrying Current	Max.	2.0 A
Dielectric Strength	Min.	400 VDC
Contact Resistance	Max.	100 mΩ
Insulation Resistance	Min.	10 <sup>9</sup> Ω
Pull - In Sensitivity		80 - 120 AT
Drop - Out Sensitivity	Min.	20 AT
Operate Time	Max.	1.5 ms
Bounce Time	Max.	0.5 ms
Release Time	Max.	1.5 ms
Resonant Frequency	Typ.	-
Operating Frequency	Max.	100 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50
Capacitance	Typ.	1.0 pF
Operate Temperature Range		-40°C + 125°C
Test Coil	Type	1500