






## CONTACT RATING

NIL:10A	UL	Resistive (Cos.θ = 1)	AC 240V / DC 24V	10A
		Inductive (Cos.θ = 0.4)	AC 240V	5A
	TUV	Resistive (Cos.θ = 1)	AC 120V	10A
		Inductive (Cos.θ = 0.4)	AC 240V / DC 24V	7A
H:7A	Resistive (Cos.θ = 1)		AC 240V / DC 24V	7A


## DIMENSIONS(±0.2mm)

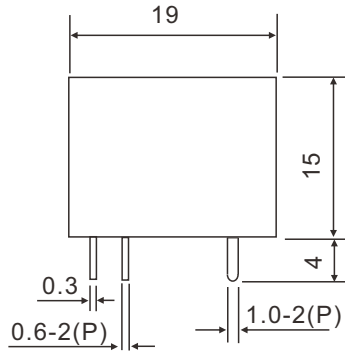

WIRING DIAGRAM  
(BOTTOM VIEW)

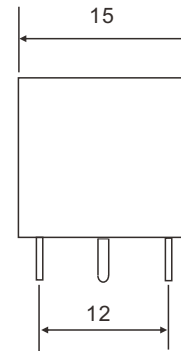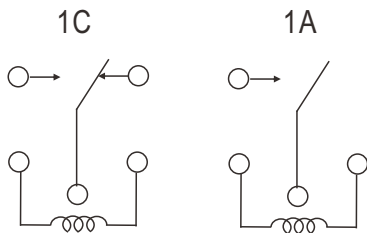

P.C.B LAYOUT  
(BOTTOM VIEW)

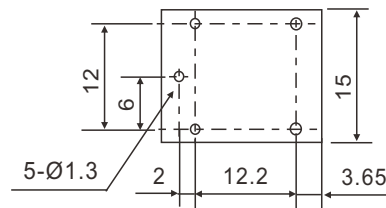

## GENERAL DATA

Insulation Resistance	100 MΩ Min. (DC 500V)
Dielectric Strength	750 VAC, 50/60Hz between contact.
	1,500 VAC, 50/60Hz between all elements.
Contact Material	Ag alloy.
Contact Resistance	100 milliohms max. ( initial value )
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	8 ms max.
Release Time	5 ms max.
Temperature Range	- 25°C ~ + 80°C
Expected Life	With operation rate 30/min.
	Mechanical - 10,000,000 operations min.
	Electrical - 100,000 operations min. at rated load.
Weight	9 grams